

S 41E MAXI



For passenger car, SUV and commercial vehicle wheels up to 27".

Car tyre changer with side swing mounting arm

New vertical post with circular section to provide more precision and less bending

Mechanical locking and vertical adjustment of mounting arm.

Self-centring four-jaw chuck with two pneumatic clamping cylinders, clockwise and anticlockwise rotation of the table top through 3 Ph **Motoinverter 2 speed**

Pressure regulator with water filter and lubricator.

Rear air tank for blast inflation system (CE norms)

Equipped with:


- Electric supply 1 Ph with moto-inverter.
- Pneumatic built-in safety valve (CE norms).
- **GP**: tubeless tyre inflation system operated by a foot-pedal (blast inflation system).

S41E Maxi with BPL SX Helper (optional)






INCLUDED ACCESSORIES

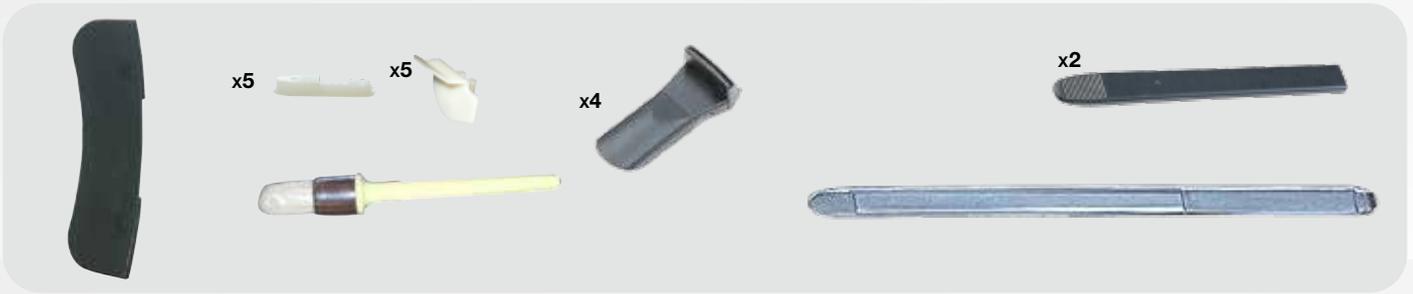

RECOMMENDED ACCESSORIES



BPL
8-11120032
Helper SX

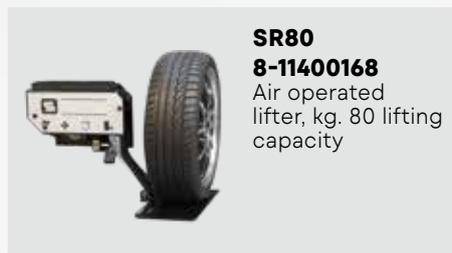

SR80
8-11400168
Air operated
lifter, kg. 80 lifting
capacity



PTR
8-11400290
Rollertail



TPA-W
8-11400329
Plastic tool head



BPC
801435685
Bead pressing
clamp



AR24
8-11100041
Set of adaptors to
increase outside
clamping capacity
by 4" (4 pcs)



ARM
8-11100036
Set of motorcycle
wheel adaptors (4
pcs)




AR69
8-11100042
Set of adaptors
to reduce outside
clamping capacity
by 4" (4 pcs)

TECHNICAL DATA

Inside clamping capacity	14" ÷ 27"
Outside clamping capacity	12" ÷ 24"
Max. wheel diameter	1280 mm
Maximum wheel width	360 mm
Operating pressure	10 bar
Power supply	230V / 1Ph / 50-60Hz
Weight	256 kg

DIMENSIONS

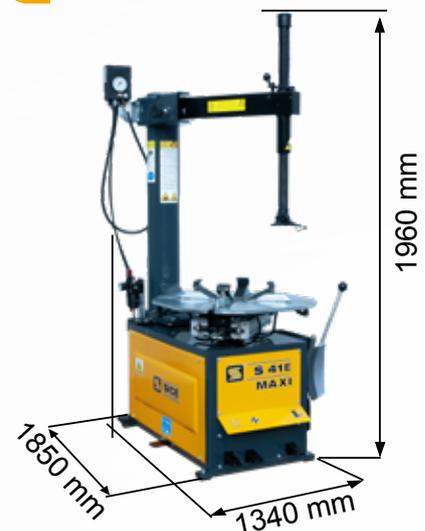

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPSC000577_06/2023